

StormStrong® Composite Crossarms

# Increase Grid Reliability with FRP Deadend & Tangent Crossarms



StormStrong®  
CROSSARMS

WHEN THE STORM HITS, IS YOUR GRID STORMSTRONG®?



*“Working with Creative Composites Group is always a good experience! All of the employees are very courteous and professional, and all questions are answered in a timely manner. The installation of StormStrong crossarms is very easy, and it saves our crews a lot of valuable time. We use the crossarms on all our deadends, on our Grade B critical crossings, and as a good addition to our many pole framing configurations. We choose StormStrong crossarms for the ease of installation, durability, resistance to rot, and comparable cost to wood.”*

**— Troy Mock, Bedford Rural Electric Cooperative, Inc.**

# Reduce Outages, Increase Grid Resiliency & Sustainability, Reduce Electrocution Hazards & Make A Green Choice

*Creative Composites Group's fiberglass utility deadend and tangent crossarms are at the forefront of sustainable technology. StormStrong crossarms are RUS approved and have been engineered to meet the requirements of the National Electric Safety Code (NESC) and to increase grid resiliency and reliability.*

## Here Are The Top Reasons Why Utility Companies Choose StormStrong Crossarms

### 1. ENGINEERED ARMS MANUFACTURED TO HIGH QUALITY STANDARDS

Our StormStrong crossarms have been designed for the rigors of electrical distribution with considerations for storms, wind, ice and UV. The deadend and tangent arms are manufactured by the pultrusion manufacturing method and exhibit a typical strength coefficient of variation (COV) of less than 5%.

### 2. ENGINEERED FOR AN EXTENDED SERVICE LIFE

The engineered arms have been designed to withstand the effects of UV. Extensive UV and moisture testing confirm that statistically no decrease in compression strength occurs when conditioned in accordance with ASTM G154 past 8,000 hours.

### 3. UNAFFECTED BY TERMITES AND WOODPECKERS

Utilities in areas prone to woodpeckers and termites are replacing wood arms with StormStrong crossarms. The FRP arms negate woodpecker and termite damage and save the utilities money and outages.

### 4. LOWER INSTALLED COST

Once a utility decides to try our crossarm, they soon discover that the material and labor savings are above and beyond that of wood and steel arms.

### 5. CAN BE FIELD FABRICATED

Unlike steel arms, StormStrong crossarms can be easily field drilled with carbide bits. In less than a minute, a new hole can be drilled in the crossarm.

### 6. ENHANCED LINEMAN SAFETY

The dielectric strength of the FRP arm is above 100kV/in, which increases worker safety while adding additional protection against potential electrical short circuiting.

### 7. DESIGN VALUES ARE PUBLISHED PER THE NESC CODE REQUIREMENTS OF 5% LOWER EXCLUSION LIMIT (LEL)

Extensive testing to ASTM D8019 provides design values based on industry standards.



# Crossarm Construction

Our tangent and deadend crossarms are made with proven pultrusion technology. This technology is the catalyst that allows us to manufacture the lightest and stiffest crossarm in the business. The lightweight crossarms reduce injury potential, while saving money in shipping and handling costs.


Many utilities prefer the Fiberglass Reinforced Polymer (FRP) crossarms over wood to increase their grid reliability. The engineered crossarm is recognized in the National Electric Safety Code (NESC) as having the same strength factor as steel. The FRP crossarm performs structurally like steel, without the negative effects of rusting and conductivity.

The crossarms can be supplied as blanks, where the utility drills and fabricates the crossarm to their requirements, for each individual structure. It's most common for utilities to specify that the crossarms be delivered drilled with hardware ready for the lineman to bolt them to the pole and clip in the wire. If your utility is looking to decrease labor and increase efficiency, let CCG provide the finished product, fabricated to your unique specifications.



## What Is Pultrusion?


Pultrusion is a continuous manufacturing process utilized to make composite profiles with constant cross-sections whereby fiberglass reinforcements, in the form of roving and mats, are saturated with resin and channelled into a heated die. The profile exits the die in a solid state and in the form of the desired cross-section.

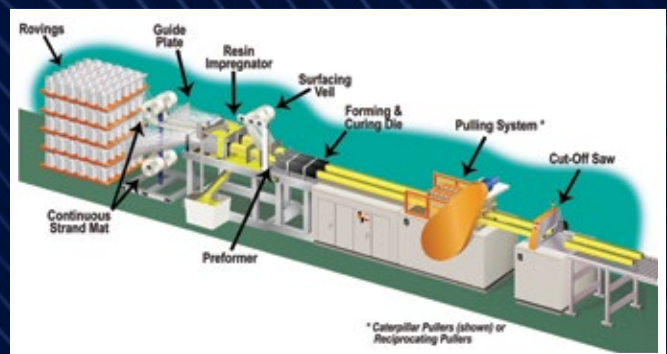

## 1. Advanced UV Protection

Our fiberglass tangent and deadend crossarms contain three layers of UV protection. First, the fiberglass reinforcements, making up the structural element of the crossarms, are encapsulated with a 10 mil polyester surfacing veil. The 10 mil veil creates a resin rich surface and protects the glass reinforcements from fiber blooming. In addition, light absorbers are formulated into the resin to block UV light from destabilizing the matrix. Finally, the crossarms are coated with a 3 mil (wet) high performance aliphatic polyurethane coating providing lasting protection from the sun's harmful rays.

QUV testing, consisting of both light and moisture, cycled every four hours for 8,000 hours, demonstrated no decrease in compression strength. Both coated and uncoated arms were mechanically and physically tested. The UV coating protected the crossarm from chalking and fading, but had little effect on the structural performance of the crossarm. Coated surfaces protect the fiberglass crossarms from long term fiber blooming and are paramount for long term performance and reducing electrical tracking.

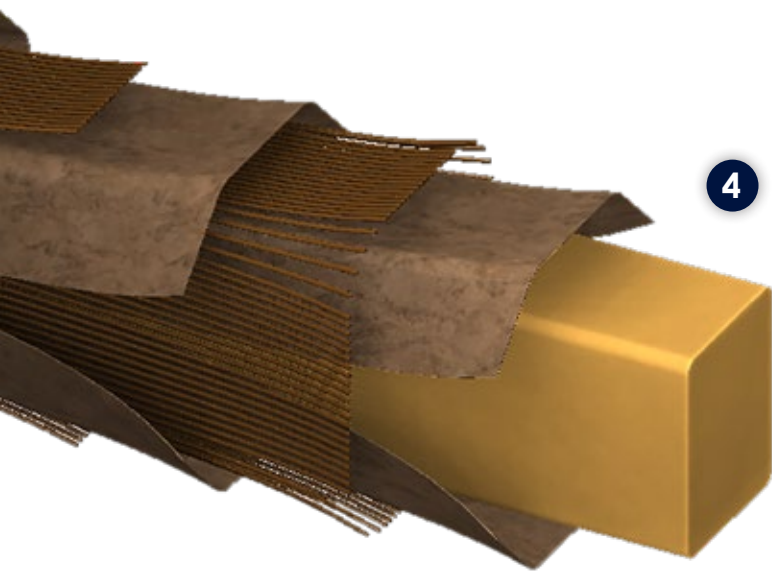

## 2. Resin/Matrix

The FRP crossarms are manufactured with a thermoset resin system exhibiting superior toughness and strength.

Thermoset resins, once cured, are very durable and resistant to moisture and harsh environments.

## 3. Fiberglass Reinforcements


All crossarms are manufactured with electrical grade E-glass reinforcements in the form of roving, Continuous Filament Mat (CFM) or engineered E-glass fabrics. All E-glass reinforcements meet a minimum tensile strength of 290 ksi per ASTM D2343.

## 4. Polyurethane Foam Fill


Our fiberglass crossarms are filled with a two-component, two-pound density closed-cell polyurethane foam. The foam core restricts moisture and insects from entering the interior of the arm.

## 5. End Caps

Our deadend and tangent crossarms are capped with thermoplastic polymer UV resistant injection molded high-impact strength caps.

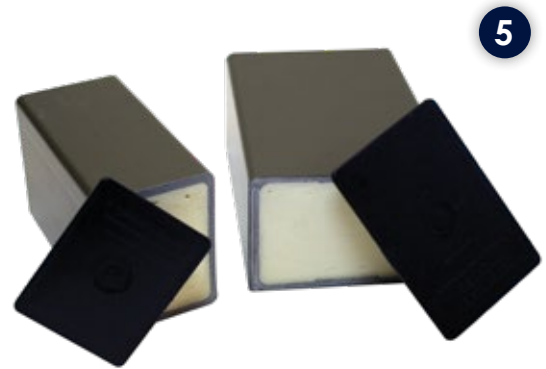

Thermoplastic UV Stable End Caps

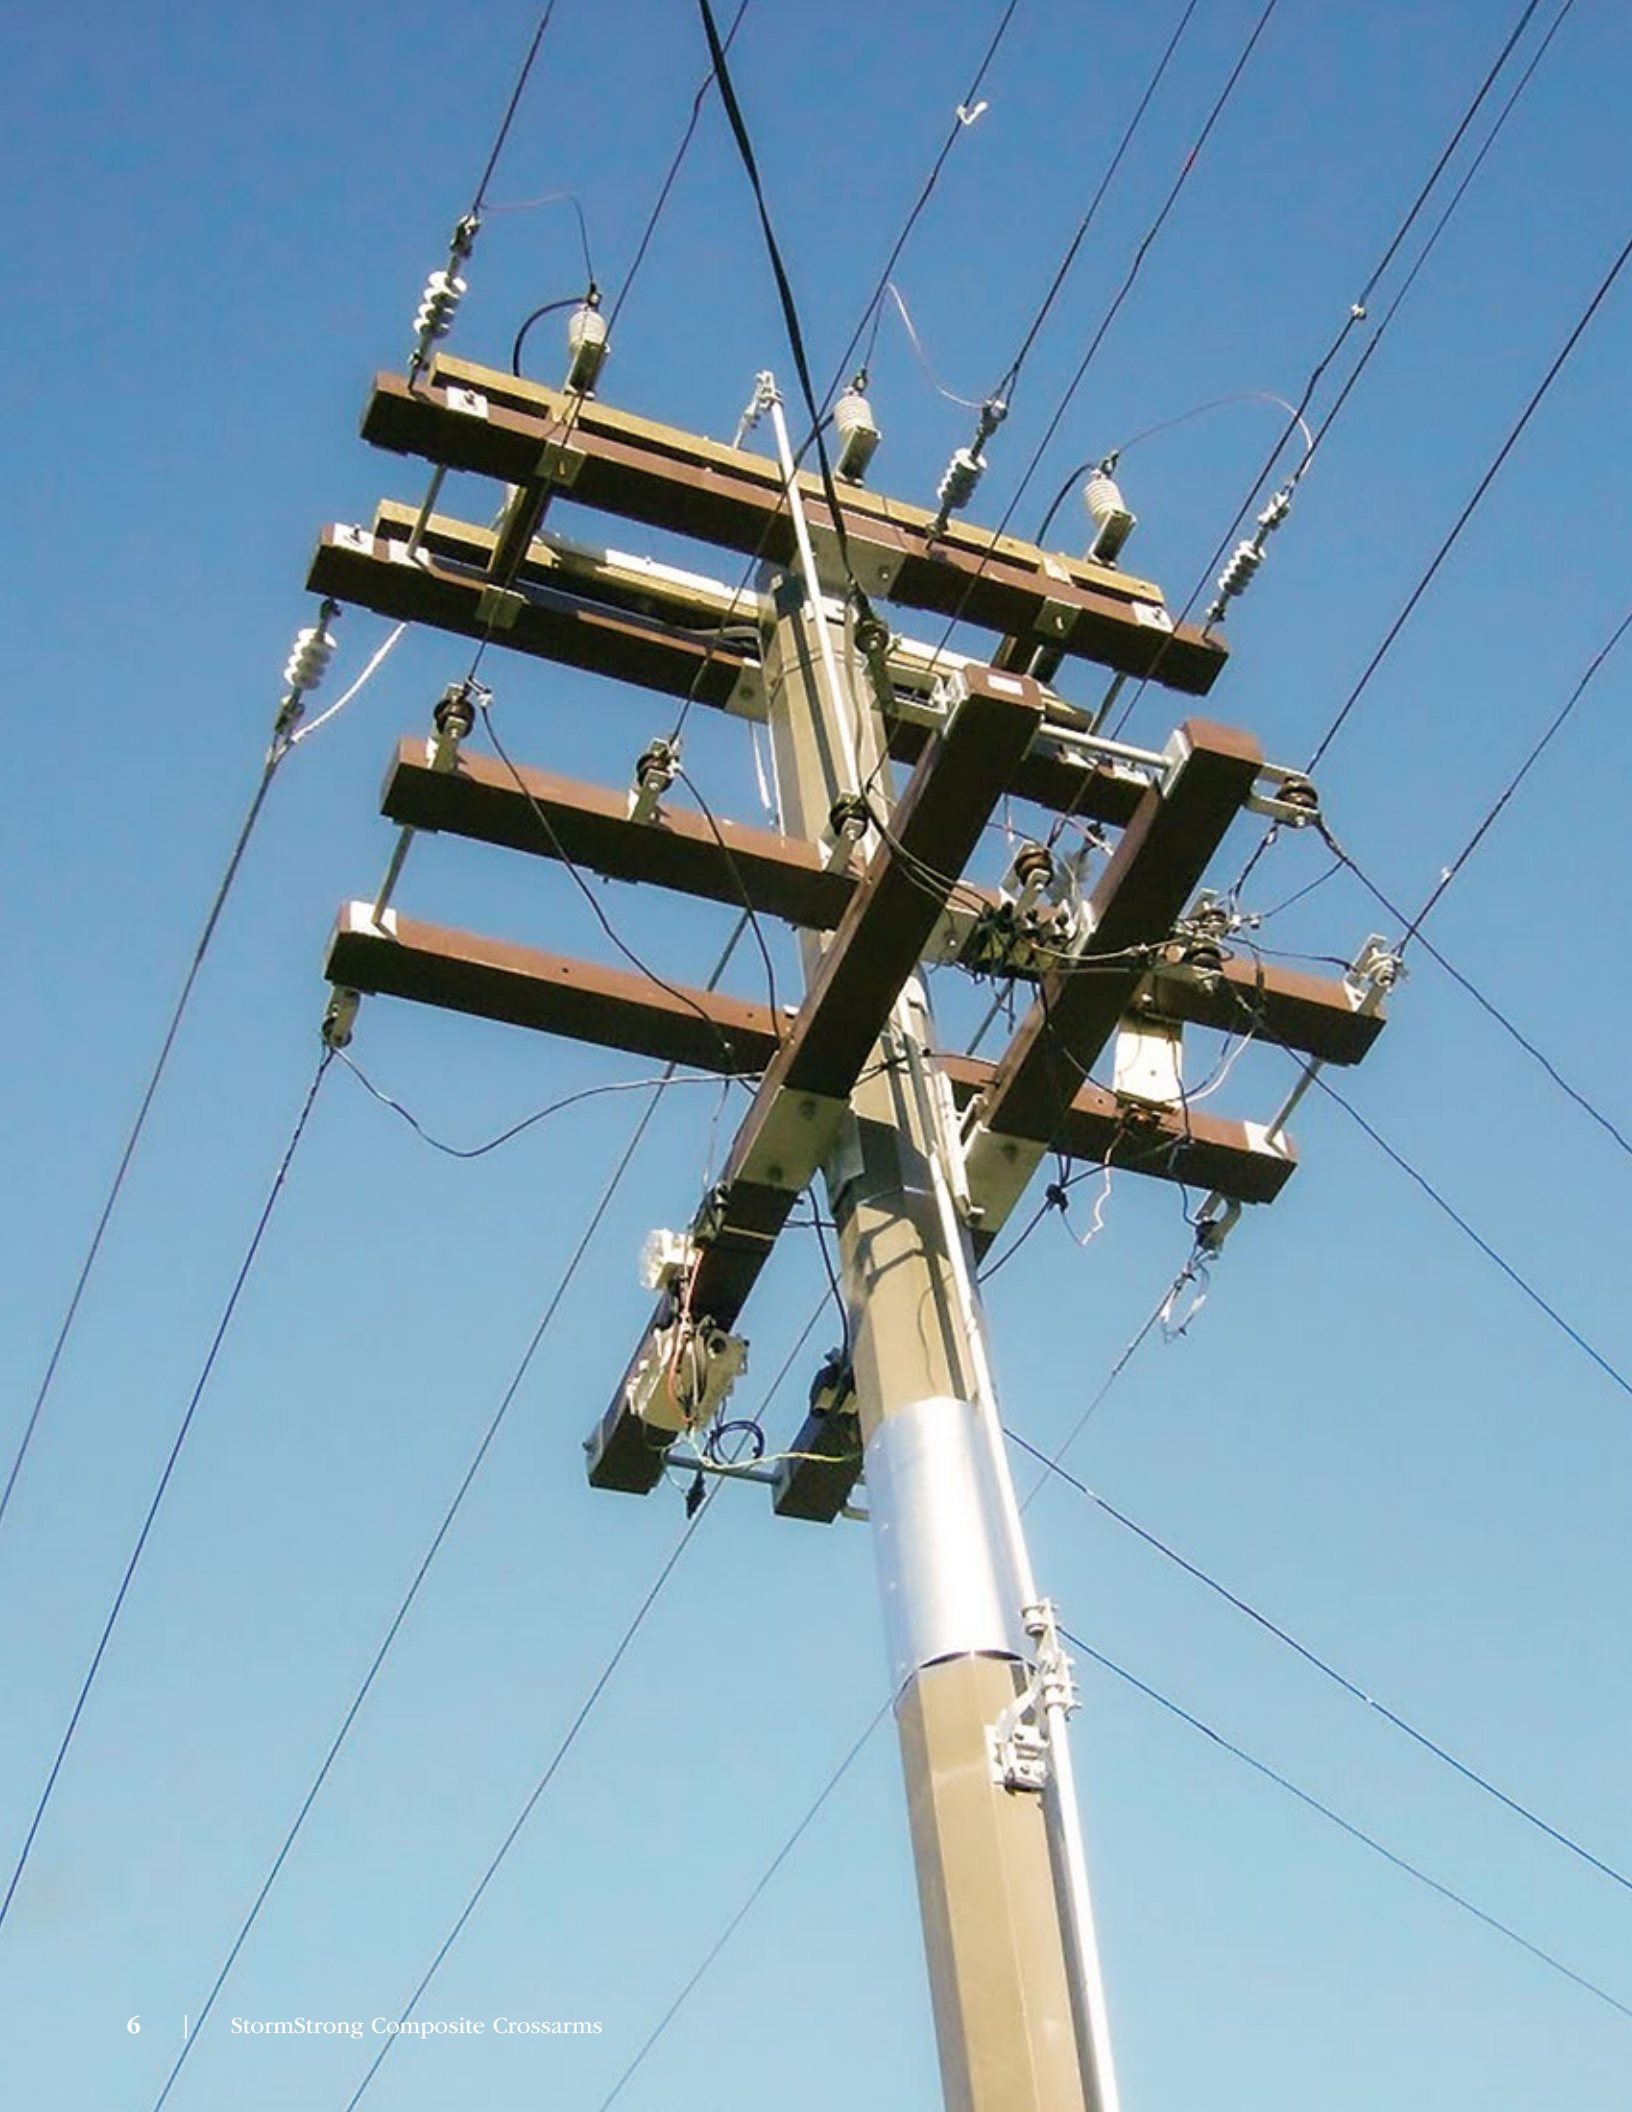

# Deadend Crossarms


StormStrong Deadend Crossarms are available in 3-5/8"x4-5/8" (92 mm x 117.5 mm) and 4"x6" (101.6 mm x 152.4 mm) rectangular cross sections. Selecting the correct crossarm, for your application, will depend on your phase loading and deflection or serviceability limitations.

In most cases, a single FRP deadend arm will replace two or three wood deadend arms resulting in significant labor and material cost savings, while still increasing the grid reliability. Linemen prefer the single deadend arm due to the significant weight reduction and safety enhancements, as compared to wood and steel arms.

CCG publishes values that have been developed per the ASTM D8019-15 protocol, both in terms of average and the 5% Lower Exclusion Limit (LEL) capacities. The National Electric Safety Code (NESC) C2-2012 mandates that pole and arm suppliers report their design values based on a 95% confidence or 5% LEL value.

Our deadend crossarms are available with or without hardware. It is common for utilities to specify the crossarms predrilled with deadend phase hardware including washers, double-arm (DA) bolts, eye nuts and a prefabricated center mount. All material hardware and steel fabrications are hot dip galvanized per ASTM A123 or A153, as appropriate.

The following charts describe the arm model, arm length, phases per arm, ultimate 5% LEL and average phase loads, deflection per 1,000 lbf phase load and the assembly weight. The utility engineer can utilize the charts to select the arm that best fits their phase loading conditions. In the event the load scenario, for your application, is not described, the mechanical and physical properties charts can be utilized for the proper selection of the material properties necessary to conduct mechanics of materials calculations representing your particular load conditions.

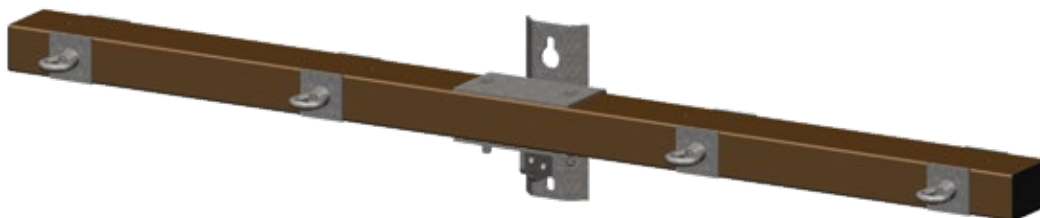

4 Phase Double Sided Deadend



## Deadend Crossarm Load Chart

Part Number	Length (ft)	Phases Per Arm	Longitudinal Loading			Vertical Loading			Weight W/ Hardware (lb)
			5% Lel Ultimate Load Per Phase (lb)	Average Ultimate Load Per Phase (lb)	Deflection Per 1000lb Phase Load (in)	5% Lel Ultimate Load Per Phase (lb)	Average Ultimate Load Per Phase (lb)	Deflection Per 1000lb Phase Load (in)	
<b>STANDARD DEADEND 4" X 6"</b>									
SD2060124KXXX	5	2	17,000	18,300	0.07	9,700	10,100	0.12	58
SD2096124KXXX	8	2	10,900	13,300	0.22	5,600	6,100	0.47	71
SD2096148KXXX	8	4	8,500	9,100	0.26	4,400	4,800	0.54	86
SD2120124KXXX	10	2	9,100	11,500	0.40	4,200	4,600	0.92	81
SD2120148KXXX	10	4	7,000	8,900	0.47	3,300	3,600	1.06	95
SD2144124KXXX	12	2	7,300	9,300	0.70	3,400	3,700	1.61	90
SD2144148KXXX	12	4	4,900	6,200	0.93	2,300	2,500	2.13	104
<b>CP2500 STANDARD DEADEND 3-5/8" X 4-5/8"</b>									
SD5060124LXXX	5	2	9,400	10,400	0.10	2,900	3,300	0.21	47
SD5096124LXXX	8	2	9,400	10,400	0.37	2,900	3,300	0.63	58
SD5096148LXXX	8	4	4,700	5,200	0.42	1,400	1,600	0.71	67
SD5120124LXXX	10	2	8,300	8,700	0.71	2,900	3,300	1.22	65
SD5120148LXXX	10	4	4,700	5,200	0.82	1,400	1,600	1.40	75
SD5144124LXXX	12	2	6,600	7,000	1.26	2,500	2,800	2.20	73
SD5144148LXXX	12	4	4,500	4,700	1.67	1,400	1,600	2.90	82
<b>CP3000 STANDARD DEADEND 3-5/8" X 4-5/8"</b>									
SD7060124LXXX	5	2	14,200	17,300	0.08	6,300	7,200	0.16	55
SD7096124LXXX	8	2	14,200	17,300	0.29	5,800	7,200	0.48	69
SD7096148LXXX	8	4	7,100	8,600	0.33	3,100	3,600	0.55	82
SD7120124LXXX	10	2	12,400	14,800	0.55	4,300	5,900	0.94	79
SD7120148LXXX	10	4	7,100	8,600	0.64	3,100	3,600	1.08	91
SD7144124LXXX	12	2	10,000	11,900	0.92	3,400	4,700	1.69	88
SD7144148LXXX	12	4	6,700	8,000	1.22	2,300	3,200	2.23	101

**Notes:**

Strength and deflection calculations are based on phase locations specified for RUS standard crossarms.

The 5% LEL value is used for strength as dictated by NESC C2-2012.

Weights include centermount, hardware, and 3/4" double sided phase hardware.

Tested per ASTM D8019-15.

Longitudinal Loading acts in the major axis of the arm parallel to the conductor.


Vertical Loading acts in the minor axis of the arm.




## Deadend Crossarm Hardware Options

CCG offers the StormStrong deadend crossarms with two, three or four phase/position hardware, in single or double deadend configurations. The mounting bracket is supplied with an integrated two-position guy attachment and is secured to the crossarm with 3/4" galvanized grade bolts.

Kit Part Number	Deadend Arm to Pole Mounting Bracket Kits	Weight
PTK012 (K)	TR150 4" x 6" Deadend Bracket Kit with Guy Attachments <b>Description:</b> Grade 50 steel deadend center mount featuring double guy attachment for 3/4" dia. hardware. Bracket is intended for mounting FRP arms to steel, wood, concrete or FRP poles in a deadend configuration. Steel fabrication and hardware galvanized per ASTM A123 and A153, welded per AWS D1.1.	21 lbs.
	<b>PTK012 Kit Includes:</b> (1) STL082 Bracket (2) FAB185 - 6" x 3/4" Bolts A325 or 5 SAE Grade (2) FAB186 - 3/4" Nuts A325 or 5 SAE Grade (2) FAB187 - 3/4" Lock/Spring Washers  Note: Bracket drilled for 12" spacing of 3/4" pole mount hardware and includes 1-1/4" steel banding slots.	
PTK017 (L)	CP2500 or CP3000 3-5/8" x 4-5/8" Deadend Bracket Kit with Guy Attachments <b>Description:</b> Grade 50 steel deadend center mount featuring double guy attachment for 3/4" dia. hardware. Bracket is intended for mounting FRP arms to steel, wood, concrete or FRP poles in a deadend configuration. Steel fabrication and hardware galvanized per ASTM A123 and A153, welded per AWS D1.1.	19 lbs.
	<b>PTK017 Kit Includes:</b> (1) STL083 Bracket (2) FAB551 - 5-1/2" x 3/4" Bolts 5 SAE Grade (2) FAB186 - 3/4" Nuts A325 or 5 SAE Grade (2) FAB187 - 3/4" Lock/Spring Washers  Note: Bracket drilled for 12" spacing of 3/4" pole mount hardware and includes 1-1/4" steel banding slots.	



STL082



STL083

### Double Deadend Hardware

The deadend hardware for a typical double deadend configuration includes a Double-Arm (DA) bolt, two 4" x 4" x 3/8" square washers or 3.5" x 3.5" x 3/8" square washers dependent upon the crossarm model, two eye nuts and a lock washer. DA bolts meet requirements of IEEE C135.1.




### Galvanized Deadend Hardware

Position/phase deadend hardware is available in single and double deadend configurations in 5/8" or 3/4" hardware. All hardware is galvanized per ASTM A123 and or A153 standards.



## Ordering Specifications

RUS Approved

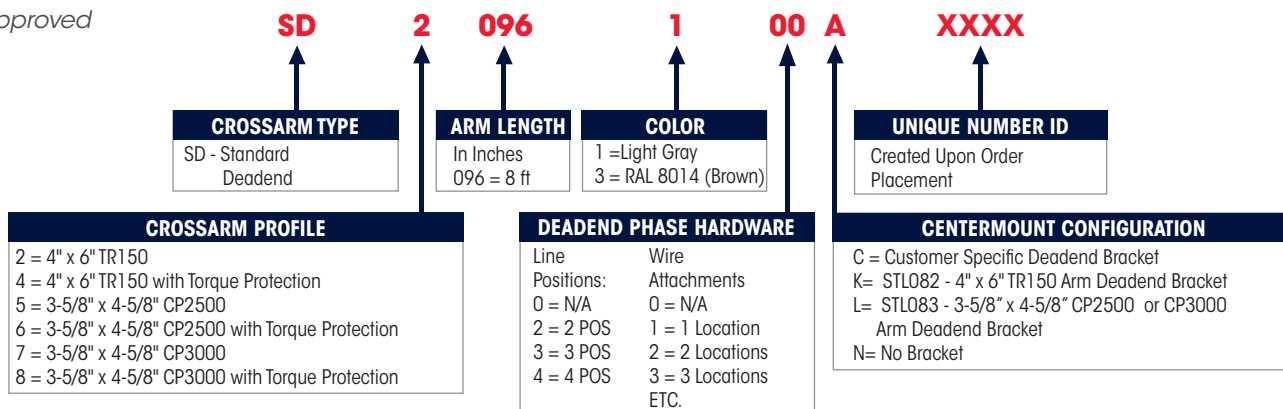

# Tangent Crossarms


StormStrong Tangent Crossarms are available in 3.5" x 4.5" (89 mm x 114.3 mm) 3-5/8"x4-5/8" (92 mm x 117.5 mm) and 4"x6" (101.6 mm x 152.4 mm) rectangular cross sections. Selecting the correct tangent crossarm, for your application, will depend on your phase loading and deflection or serviceability limitations.

CCG publishes values that have been developed per the ASTM D8019-15 protocol, both in terms of average and the 5% Lower Exclusion Limit (LEL) capacities. The National Electric Safety Code (NESC) C2-2012 mandates that pole and arm suppliers report their design values based on a 95% confidence or 5% LEL value.

Our tangent crossarms are available with or without hardware. It is common for utilities to specify the crossarms

predrilled with prefabricated tangent center mounts. All mounting hardware and steel fabrications are hot dip galvanized per ASTM A153 and A123.

The following charts describe the arm model, arm length, phases per arm, ultimate 5% LEL and average phase loads, deflection per 1,000 lbf phase load and the assembly weight. The utility engineer can utilize the charts to select the arm that best fits their phase loading conditions. In the event that the load scenario, for your application, is not described in the charts, the mechanical and physical properties charts can be utilized for the proper selection of the material properties necessary to conduct mechanics of materials calculations representing your particular load conditions.

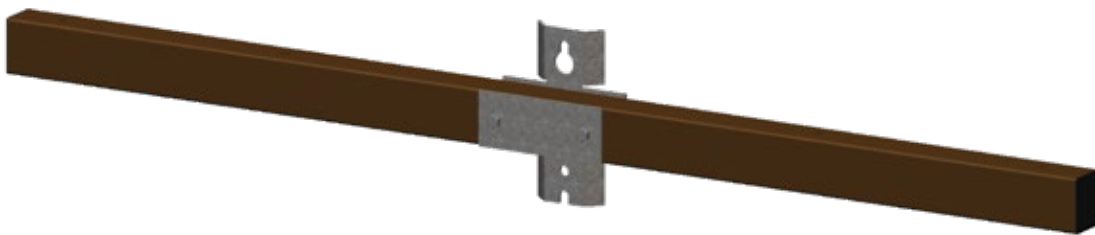

Typical Tangent Crossarm



## Tangent Crossarm Load Chart

Part Number	Length (ft)	Phases Per Arm	5% Lel Ultimate Load Per Phase (lb)	Average Ultimate Load Per Phase (lb)	Deflection Per 1000lb Phase Load (in)	Weight W/ Hardware (lb)
<b>MEDIUM TANGENT 3.5" X 4.5"</b>						
MT1060100WXXXX	5	2	5,700	5,900	0.32	29
MT1096100WXXXX	8	2	4,000	4,300	0.78	38
MT1096100WXXXX	8	4	2,800	2,900	0.90	38
MT1120100WXXXX	10	2	3,100	3,300	1.40	44
MT1120100WXXXX	10	4	2,400	2,600	1.61	44
MT1144100WXXXX	12	2	2,600	2,800	2.21	50
MT1144100WXXXX	12	4	1,600	1,800	3.10	50
<b>CP2200 MEDIUM TANGENT 3-5/8" X 4-5/8"</b>						
MT9060100WXXXX	5	2	5,500	5,700	0.31	30
MT9096100WXXXX	8	2	3,900	4,600	0.99	39
MT9096100WXXXX	8	4	2,700	2,800	1.13	39
MT9120100WXXXX	10	2	3,000	3,500	1.18	45
MT9120100WXXXX	10	4	2,300	2,800	1.35	45
<b>CP2500 HEAVY TANGENT 3-5/8" X 4-5/8"</b>						
HT5060100MXXXX	5	2	5,400	6,300	0.24	37
HT5096100MXXXX	8	2	5,400	6,300	0.53	48
HT5096100MXXXX	8	4	2,700	3,100	0.60	48
HT5120100MXXXX	10	2	5,400	6,300	0.93	55
HT5120100MXXXX	10	4	2,700	3,100	1.06	55
HT5144100MXXXX	12	2	5,200	5,400	1.41	63
HT5144100MXXXX	12	4	2,700	3,100	1.97	63
<b>CP3000 HEAVY TANGENT 3-5/8" X 4-5/8"</b>						
HT7060100PXXXX	5	2	11,400	12,200	0.19	46
HT7096100PXXXX	8	2	11,400	12,200	0.41	61
HT7096100PXXXX	8	4	5,700	6,100	0.47	61
HT7120100PXXXX	10	2	11,400	12,200	0.72	70
HT7120100PXXXX	10	4	5,700	6,100	0.82	70
HT7144100PXXXX	12	2	9,600	10,400	1.04	80
HT7144100PXXXX	12	4	5,700	6,100	1.45	80
<b>HEAVY TANGENT 4" X 6"</b>						
HT2060100DXXXX	5	2	14,200	15,200	0.1	42
HT2096100DXXXX	8	2	11,200	12,000	0.3	56
HT2096100DXXXX	8	4	7,100	7,600	0.35	56
HT2120100DXXXX	10	2	8,600	9,200	0.53	65
HT2120100DXXXX	10	4	6,700	7,100	0.61	65
HT2144100DXXXX	12	2	7,200	7,700	0.78	74
HT2144100DXXXX	12	4	4,600	5,000	1.09	74

**Notes:**

Strength and deflection calculations are based on phase locations specified for RUS standard crossarms.




The 5% LEL value is used for strength as dictated by NESC C2-2012.

Weights include centermount and hardware.


Tested per ASTM D8019-15.

## Tangent Crossarm Hardware Options


Tangent arm-to-pole mounts are available in six configurations. Specifically, STL075, STL078, STL084, STL081, STL085, STL087 and STL089. The tangent arms do not require braces if used with the tangent pole mount and hardware.

Kit Part Number	Tangent Arm to Pole Mounting Bracket Kits	Weight
 <p data-bbox="228 684 318 716">STL075</p>	<p data-bbox="651 405 1154 428">TR100 3-1/2" x 4-1/2" Heavy Duty Channel Tangent Bracket Kit</p> <p data-bbox="651 443 1365 516"><b>Description:</b> Grade 50 steel tangent mount. Bracket is intended for mounting FRP arms to steel, wood, concrete or FRP poles in a tangent configuration. Steel fabrication and hardware galvanized per ASTM A123 and A153, welded per AWS D1.1.</p> <p data-bbox="651 543 837 567"><b>PTK010 Kit Includes:</b></p> <ul data-bbox="651 569 1016 695" style="list-style-type: none"> <li>(1) STL075 Bracket</li> <li>(1) FAB437 - 11" x 4.5" x 1/4" Steel Plate</li> <li>(2) FAB551 - 5-1/2" x 3/4" Bolts 5 SAE Grade</li> <li>(2) FAB186 - 3/4" Nuts A325 or 5 SAE Grade</li> <li>(2) FAB187 - 3/4" Lock/Spring Washers</li> </ul> <p data-bbox="651 722 1352 768">Note: Bracket drilled for 10" or 12" spacing of 3/4" pole mount hardware and includes 1-1/4" steel banding slots.</p>	<p data-bbox="1409 575 1466 598">22 lbs.</p>
 <p data-bbox="228 1062 318 1094">STL078</p>	<p data-bbox="651 814 922 837">TR150 4" x 6" Tangent Bracket Kit</p> <p data-bbox="651 852 1365 926"><b>Description:</b> Grade 50 steel tangent mount. Bracket is intended for mounting FRP arms to steel, wood, concrete or FRP poles in a tangent configuration. Steel fabrication and hardware galvanized per ASTM A123 and A153, welded per AWS D1.1.</p> <p data-bbox="651 953 837 976"><b>PTK015 Kit Includes:</b></p> <ul data-bbox="651 978 1052 1104" style="list-style-type: none"> <li>(1) STL078 Bracket</li> <li>(1) FAB438 - 11" x 6" x 3/8" Steel Plate</li> <li>(2) FAB185 - 6" x 3/4" Bolts A325 or 5 SAE Grade</li> <li>(2) FAB186 - 3/4" Nuts A325 or 5 SAE Grade</li> <li>(2) FAB187 - 3/4" Lock/Spring Washers</li> </ul> <p data-bbox="651 1131 1352 1178">Note: Bracket drilled for 10" or 12" spacing of 3/4" pole mount hardware and includes 1-1/4" steel banding slots.</p>	<p data-bbox="1409 984 1466 1008">19 lbs.</p>
 <p data-bbox="228 1539 318 1570">STL078</p>	<p data-bbox="651 1224 987 1247">TR100 3-1/2" x 4-1/2" Tangent Bracket Kit</p> <p data-bbox="651 1262 1365 1335"><b>Description:</b> Grade 50 steel tangent mount. Bracket is intended for mounting FRP arms to steel, wood, concrete or FRP poles in a tangent configuration. Steel fabrication and hardware galvanized per ASTM A123 and A153, welded per AWS D1.1.</p> <p data-bbox="651 1362 837 1386"><b>PTK011 Kit Includes:</b></p> <ul data-bbox="651 1388 1016 1514" style="list-style-type: none"> <li>(1) STL078 Bracket</li> <li>(1) FAB437 - 11" x 4.5" x 1/4" Steel Plate</li> <li>(2) FAB551 - 5-1/2" x 3/4" Bolts 5 SAE Grade</li> <li>(2) FAB186 - 3/4" Nuts A325 or 5 SAE Grade</li> <li>(2) FAB187 - 3/4" Lock/Spring Washers</li> </ul> <p data-bbox="651 1541 1352 1587">Note: Bracket drilled for 10" or 12" spacing of 3/4" pole mount hardware and includes 1-1/4" steel banding slots.</p>	<p data-bbox="1409 1394 1466 1417">15 lbs.</p>


Kit Part Number	Tangent Arm to Pole Mounting Bracket Kits	Weight
PTK018 (M)	<p>CP2500 3-5/8" x 4-5/8" Tangent Bracket Kit</p> <p><b>Description:</b> Grade 50 steel tangent mount. Bracket is intended for mounting FRP arms to steel, wood, concrete or FRP poles in a tangent configuration. Steel fabrication and hardware galvanized per ASTM A123 and A153, welded per AWS D1.1.</p> <p><b>PTK018 Kit Includes:</b></p> <ul style="list-style-type: none"> <li>(1) STL084 Bracket</li> <li>(1) FAB496 - 14"x4.5"x1/4" Steel Plate</li> <li>(2) FAB551 - 5-1/2" x 3/4" Bolts 5 SAE Grade</li> <li>(2) FAB186 - 3/4" Nuts A325 or 5 SAE Grade</li> <li>(2) FAB187 - 3/4" Lock/Spring Washers</li> </ul> <p>Note: Bracket drilled for 8", 10" or 12" spacing of 3/4" pole mount hardware and includes 1-1/4" steel banding slots.</p>	18 lbs.
PTK019 (J)	<p>TR150 4" x 6" Heavy Duty Channel Tangent Bracket Kit</p> <p><b>Description:</b> Grade 50 steel tangent mount. Bracket is intended for mounting FRP arms to steel, wood, concrete or FRP poles in a tangent configuration. Steel fabrication and hardware galvanized per ASTM A123 and A153, welded per AWS D1.1.</p> <p><b>PTK019 Kit Includes:</b></p> <ul style="list-style-type: none"> <li>(1) STL081 Bracket</li> <li>(1) FAB438 - 11"x 6"x 3/8" Steel Plate</li> <li>(2) FAB185 - 6" x 3/4" Bolts A325 or 5 SAE Grade</li> <li>(2) FAB186 - 3/4" Nuts A325 or 5 SAE Grade</li> <li>(2) FAB187 - 3/4" Lock/Spring Washers</li> </ul> <p>Note: Bracket drilled for 10" or 12" spacing of 3/4" pole mount hardware and includes 1-1/4" steel banding slots.</p>	28 lbs.
PTK021 (P)	<p>CP3000 3-5/8" x 4-5/8" Tangent Bracket Kit</p> <p><b>Description:</b> Grade 50 steel tangent mount. Bracket is intended for mounting FRP arms to steel, wood, concrete or FRP poles in a tangent configuration. Steel fabrication and hardware galvanized per ASTM A123 and A153, welded per AWS D1.1.</p> <p><b>PTK021 Kit Includes:</b></p> <ul style="list-style-type: none"> <li>(1) STL085 Bracket</li> <li>(1) FAB496 - 14"x4.5"x1/4" Steel Plate</li> <li>(2) FAB551 - 5-1/2" x 3/4" Bolts 5 SAE Grade</li> <li>(2) FAB186 - 3/4" Nuts A325 or 5 SAE Grade</li> <li>(2) FAB187 - 3/4" Lock/Spring Washers</li> </ul> <p>Note: Bracket drilled for 8", 10" or 12" spacing of 3/4" pole mount hardware and includes 1-1/4" steel banding slots.</p>	23 lbs.



STL084



STL081



STL085


## Tangent Crossarm Hardware Options



Kit Part Number	Tangent Arm to Pole Mounting Bracket Kits	Weight
PTK022 (W)	<p>CP2200 3-5/8" x 4-5/8" or TR100 3-1/2" x 4-1/2" Tangent Bracket Kit</p> <p><b>Description:</b> Grade 50 steel tangent mount. Bracket is intended for mounting FRP arms to steel, wood, concrete or FRP poles in a tangent configuration. Steel fabrication and hardware galvanized per ASTM A123 and A153, welded per AWS D1.1.</p> <p><b>PTK022 Kit Includes:</b></p> <ul style="list-style-type: none"> <li>(1) STL089 Bracket</li> <li>(1) FAB496 - 14"x4.5"x1/4" Steel Plate</li> <li>(2) FAB551 - 5-1/2" x 3/4" Bolts 5 SAE Grade</li> <li>(2) FAB186 - 3/4" Nuts A325 or 5 SAE Grade</li> <li>(2) FAB187 - 3/4" Lock/Spring Washers</li> </ul> <p>Note: Bracket drilled for 8", 10" or 12" spacing of 3/4" pole mount hardware and includes 1-1/4" steel banding slots.</p>	15 lbs.
PTK023 (Q)	<p>CP2200, CP2500 or CP3000 3-5/8" x 4-5/8" Tangent Bracket Kit</p> <p><b>Description:</b> Grade 50 steel tangent mount. Bracket is intended for mounting FRP arms to steel, wood, concrete or FRP poles in a tangent configuration. Steel fabrication and hardware galvanized per ASTM A123 and A153, welded per AWS D1.1.</p> <p><b>PTK023 Kit Includes:</b></p> <ul style="list-style-type: none"> <li>(1) STL087 Bracket</li> <li>(1) FAB437 - 11"x 4.5"x 1/4" Steel Plate</li> <li>(2) FAB551 - 5-1/2" x 3/4" Bolts 5 SAE Grade</li> <li>(2) FAB186 - 3/4" Nuts A325 or 5 SAE Grade</li> <li>(2) FAB187 - 3/4" Lock/Spring Washers</li> </ul> <p>Note: Bracket drilled for 10" or 12" spacing of 3/4" pole mount hardware and includes 1-1/4" steel banding slots.</p>	22 lbs.

## Ordering Specifications

RUS Approved

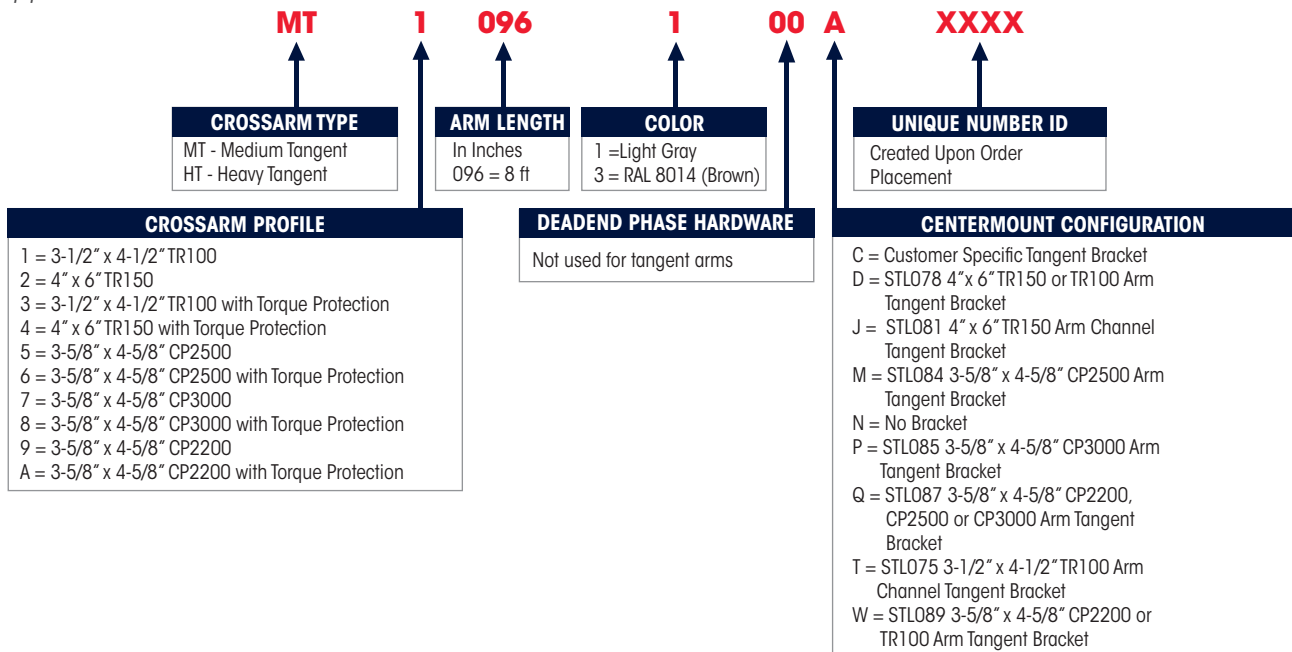

# Bolt Torque Protection

Over-torque protection is available to protect the FRP crossarms from damage due to over-tightening of the hardware. The over-torque protection system protects the arm against torque loads up to 250 lbf-ft. We recommend a maximum torque of 25 lbf-ft.

In general, the nut should be hand tightened and then snugged with a ½ turn of the wrench. A good visual detection involves snugging the nut until the spring washer is compressed. It takes between 20 and 25 lbf-ft of torque to compress a 5/8" or 3/4" pole line hardware spring washer.

Crossarms that are shipped with center mount brackets and phase hardware require no field tightening or loosening. The proper torque has been set at the factory.



**StormStrong**

Torque Protection Bushings  
Factory or Field Applied





# Crossarm Specifications

## GENERAL

The tangent and deadend crossarms shall be manufactured by Creative Composites Group, of Alum Bank, PA 15521. The arm shall be pultruded and strength rated per the 5% LEL requirements as set forth in NESC C2-2012.

## VISUAL REQUIREMENTS

The arms shall be manufactured per the visual standard ASTM D4385.

## UV PROTECTION

The crossarms shall be encompassed with a 10 mil polyester surface veil to protect the glass reinforcements from fiber blooming. The arms shall be coated with a 3 mil (wet) film thickness aliphatic polyurethane UV protection coating. In addition, the crossarms shall contain light absorbers in the matrix for long term UV radiation protection.

## HARDWARE AND FABRICATED STEEL

All brackets and hardware shall be manufactured in accordance with ASTM A123 and ASTM A153 and welded per AWS D1.1.

## DIMENSIONAL REQUIREMENTS

The arms shall be manufactured to the dimensional requirements as set forth in ASTM D3917. In addition, the fabrication tolerances shall conform to the following dimensional requirements:

Arm Length:  $+1/2"$ ,  $-0"$  (+13mm, -0mm)

Squareness of End Cut:  $1/8"$  (3mm)

Hole Diameter:  $\pm .020"$  (.5mm)

Hole Location:  $\pm 1/4"$  (6mm)

### *Dimensional Requirements Notes:*

1.0 Arm includes the end cap.

2.0 All bolted connections require a minimum nut to thread engagement of one full nut.

## FOAM

The foam shall be a two component polyurethane foam with a density of 2 pcf.

## COLOR OPTIONS

The arms shall be light gray or RAL 8014 brown in color.





## PROPERTIES

Mechanical Properties	4" x 6" Heavy Deadend & Heavy Tangent (TR150)	3-5/8"x4-5/8" Heavy Deadend & Heavy Tangent (CP3000)	3-5/8"x4-5/8" Heavy Deadend & Heavy Tangent (CP2500)	3-5/8"x4-5/8" Medium Tangent (CP2200)	4.5" x 3.5" Medium Tangent (TR100)
Full Section Flexural Strength, 5% LEL Value (psi) ASTM D8019-15	55,135	94,510	76,688	37,291	37,204
Full Section Compression Strength, 5% LEL Value (psi) ASTM D8019-15	55,135	94,510	76,688	37,291	37,204
Full Section Modulus of Elasticity (psi) ASTM D8019-15	5,463,000	6,245,000	5,959,000	5,090,000	4,207,000
In-Plane Shear Strength, 5% LEL Value (psi) ASTM D8019-15	7,197	5,847	4,861	3,728	3,487
Ultimate Shear Capacity, 5% LEL Value, Major Axis (lbf) ASTM D8019-15	17,092	14,231	9,418	5,518	5,774
Pin Bearing Strength, Crosswise <sup>1</sup> , 5% LEL Value (psi)	.25" wall/24,909 .30" wall/22,690	.32" wall/16,075 .35" wall/11,027	.25" wall/15,624 .27" wall/8,612	.19" wall/6,453 .20" wall/7,148	.19" wall/27,189 .25" wall/13,344
Pin Bearing Strength, Lengthwise <sup>2</sup> , 5% LEL Value (psi)	.25" wall/30,417 .30" wall/34,665	.32" wall/30,609 .35" wall/26,446	.25" wall/26,239 .27" wall/28,676	.19" wall/20,624 .20" wall/21,344	.19" wall/13,148 .25" wall/21,111
<b>Physical Properties</b>					
Water Absorption ASTM D570	% Max. 0.6	% Max. 0.6	% Max. 0.6	% Max. 0.6	% Max. 0.6
Moment of Inertia about the major axis (in <sup>4</sup> )	24.9	15.0	12.3	9.6	9.9
Section Modulus about the major axis (in <sup>3</sup> )	8.3	6.5	5.3	4.2	4.4
Moment of Inertia about the minor axis (in <sup>4</sup> )	11.5	9.7	8.0	6.4	5.9
Section Modulus about the minor axis (in <sup>3</sup> )	5.7	5.4	4.4	3.5	3.4
Flange thickness (in)	0.30	0.35	0.27	0.20	0.25
Web thickness (in)	0.25	0.32	0.25	0.19	0.19
<b>Electrical Properties</b>					
Dielectric Strength per ASTM D149-09 Method A, Short-Time Test(kV/in)	150	150	150	150	150
ASTM F711 (100 kVAC per foot - minutes dry)	passed	passed	passed	passed	passed
IEEE978 (75 kVAC per foot - 1 minute wet)	passed	passed	passed	passed	passed

Notes:

1. Crosswise direction is perpendicular to the length of the arm.
2. Lengthwise is the direction parallel to the arm length.



# Testing

The crossarms, that were tested to determine the design strength and serviceability characteristics published in this document, were tested per ASTM D8019-15.

The design values are based on full section testing of numerous FRP crossarms to failure. The test results were used to establish the ultimate phase loading capacity dependent upon the length of the arm. In addition, pin bearing strength tests have been performed to establish the 5% LEL pin bearing strength of the crossarms. Note: the pin bearing tests were conducted with 3/4" bolts. The 5% LEL value represents a statistical method for characterizing the nominal strength.

The nominal 5% LEL strength is a value that suggests 95 out of 100 samples tested will meet or exceed the published nominal strength. Defined as 5% LEL (lbs.) = Mean Strength (lbs.) x (1 - 1.645 COV).

**For additional information pertaining to reliability based designs please refer to:**

ASCE: Manuals and reports on Engineering Practice No. 111, the Reliability-Based Design of Utility Pole Structures.


*Note, a 5% LEL value is required based on the NESC Code.*

# Standard Installation Procedures



## 1.

Our deadend and tangent crossarms can be delivered ready to mount to the pole. All hardware and mounting brackets are installed in the manufacturing plant to the highest quality standards, so no assembly is required. The arm can be mounted to a wood or FRP pole by simply measuring the distance between the mounting holes and drilling the pole accordingly.

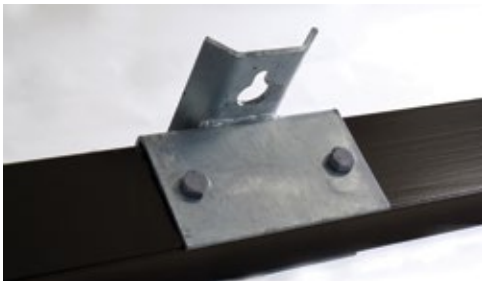

## 2.

The mounting bracket features a keyhole fabrication so that the arm can be placed over the mounting bolt during the mounting process. This feature saves time and reduces strain on the lineman. Once the holes have been drilled, simply position the arm/ bracket assembly on the pole and tighten the bolts.



## 3.

When attaching insulators or hardware to the crossarm, always use oversized washers such as 4" x 4" x 1/4" or 3.5"x 3.5"x 3/8" washers to back the bolts. FRP crossarms are not solid and can be damaged due to localized compression stresses. Never torque a bolt more than 25 ft. lb. As a general rule, only tighten the bolt until the compression lock washer has been compressed, or if no compression lock washer is utilized, hand tighten the nut and apply a 1/2 to one full turn of the nut with a wrench.



## 4.

In the event you need to field drill the arm, simply drill the hole with a carbide bit. Do not use a wood bit. The dust and drill filings are considered a nuisance dust; therefore, gloves, long sleeved shirts and safety glasses should be worn during field fabrication. The dust is non-toxic and will not cause any harm to your skin or lungs as determined by OSHA.

### ATTACHING HARDWARE TO FIBERGLASS POLES:

The fiberglass poles will not change dimensionally with temperature or moisture as with a wood pole. Therefore, simply tighten the bolt so that the compression lock washer has been compressed or hand tighten 1/2 turn. There is no need to over tighten the mounting bolts when attaching to an FRP pole. In fact, over tightening of the bolts could result in crush failing the FRP pole.

# Partner With Creative Composites Group

## Your Single Source for Innovative Engineered Solutions Using Fiber Reinforced Polymer Composites

Advance your products and projects beyond the limitations of traditional concrete, steel, and wood by leveraging the combined strength of Creative Composites Group.

**We are the driving force of technical innovation that has created the industry's most advanced engineered FRP.** Our team of industry leaders includes:

- Creative Pultrusions
- E.T. Techtonics
- Tower Tech
- Composite Advantage
- Kenway Composites

As Creative Composites Group, we can help you to create products and structures of any size or shape — for projects of any ambition or vision.

Other companies commoditize FRP in off-the-shelf shapes and forms; Creative Composites Group does not. We are the single source for the broadest range of engineered FRP solutions to build your ideal projects. That's possible only with our proven engineering processes and end-to-end collaboration, service and support resources.

## Discover Your Custom Engineered FRP Provider

We're much more than a construction material supplier. Creative Composites Group is committed to becoming a trusted business partner who is keenly interested in your project's success.

Creative Composites Group works alongside your team, from facility owners to design engineers to contractors, to help you develop the most economical FRP solution that meets the most demanding structural requirements and environmental conditions.

*Have a project that you think engineered FRP is right for? Call us.  
We'd be thrilled to discuss it with you.*

### Contact Our Composites Specialists

**(888) 274-7855**

**CreativeCompositesGroup.com**



#### **Creative Composites Group**

888-274-7855

214 Industrial Lane  
Alum Bank, PA 15521

CreativeCompositesGroup.com

DLR10202R2  
©2022 Creative Composites Group  
All Rights Reserved Worldwide